

# Commercial Electric Vehicle Charging Stations

**FEATURES**

**PRODUCT FEATURES**

Modern compact design with robust construction for maximum durability


- Rapid Level 2 charging—7.2 - 7.7kW output provides up to 8x faster charging versus standard Level 1
- Suitable for indoor and outdoor use, NEMA 4 rated
- Multiple charge cable length selections to fit your charging area location needs
- Up to four charging station (port) options
- EvoReel® with standard 3-foot interconnect and 22-foot charge cable, and the optional, industry's longest, 30 foot charge cable, can be mounted on wall, pedestal or overhead.

**OPTIONAL ACCESSORIES**

Cable management solutions for the ultimate cord convenience, cleanliness and safety

- EvoReel with Charge Cable—self retracting and locking for overhead, wall or pedestal mount
- Retractor—spring loaded tether, suspends cable to effortlessly draw cable back for convenient storage Holster

Flexible open network OCPP (wi-fi & LTE cellular) and non-networked charging stations

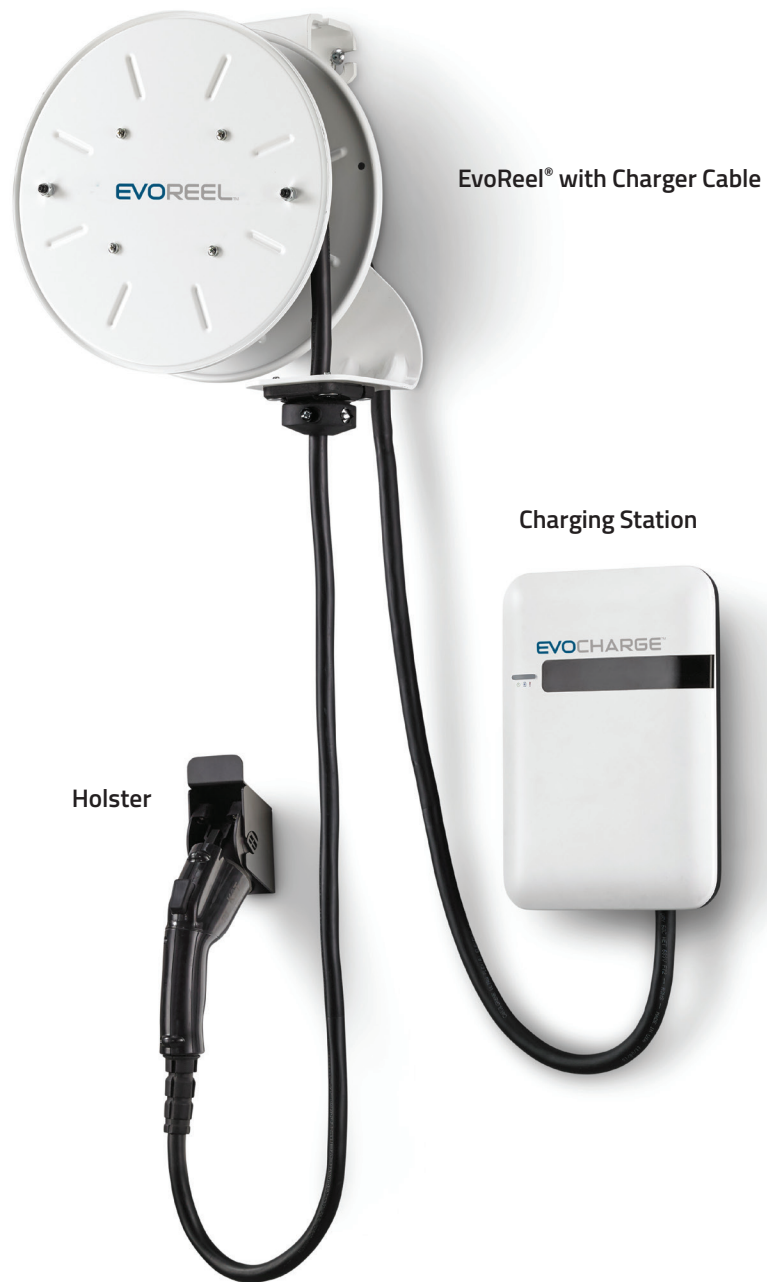

# Commercial Electric Vehicle Charging Stations

## CABLE MANAGEMENT OPTIONAL ACCESSORIES

Select the appropriate charging station for your installation needs. Consider optional accessories for additional cable management solutions.

### EVOCHARGE® EVSE 30A, 7.2KW EVOREEL® AND HOLSTER

Part Number	Cable Length	Power Connection	Ports	Mounting
EVC4AA0C2B1A1	22 ft.	Plug-In*	Single	Wall
EVC4AA0D2B1A1	30 ft.	Plug-In*	Single	Wall
EVC4AA0C1B1B3	22 ft.	Hardwire	Dual	6 ft. Pedestal
EVC4AA0D1B1B3	30 ft.	Hardwire	Dual	6 ft. Pedestal

### Optional Accessories Shown



Cable Retractor

### EVOCHARGE IEVSE® 32A, 7.2KW, WI-FI AND OCPP DEMAND RESPONSE AND LOCAL LOAD MANAGEMENT COMPATIBLE WITH EVOREEL AND HOLSTER\*\*

Part Number	Cable Length	Power Connection	Ports	Mounting
EVC4AB0C2B1A1	22 ft.	Plug-In*	Single	Wall
EVC4AB0D2B1A1	30 ft.	Plug-In*	Single	Wall
EVC4AB0C1B1B3	22 ft.	Hardwire	Dual	6 ft. Pedestal
EVC4AB0D1B1B3	30 ft.	Hardwire	Dual	6 ft. Pedestal



Dual Port 6 ft. Channel Pedestal with EvoReel® Shown

### EVOCHARGE IEVSE® PLUS 32A, 7.2KW, WI-FI OR 4G-LTE CELLULAR, RFID CARD READER AND OCPP, DEMAND RESPONSE AND LOCAL LOAD MANAGEMENT COMPATIBLE WITH EVOREEL AND HOLSTER\*\*

Part Number	Cable Length	Power Connection	Ports	Mounting
EVC4AC0C1B1A1	22 ft.	Hardwire	Single	Wall
EVC4AC0D1B1A1	30 ft.	Hardwire	Single	Wall
EVC4AC0C1B1B3	22 ft.	Hardwire	Dual	6 ft. Pedestal
EVC4AC0D1B1B3	30 ft.	Hardwire	Dual	6 ft. Pedestal

\* For hardwired input circuit connection, input plug can simply be removed by a certified electrician during installation.  
 \*\* Optional OCPP requires the use of a third-party network service provider. Charges will apply. Please visit our website

### OPTIONAL ACCESSORIES (Contact us for Part Number)

Part	Interconnect Length	Cable Lengths (excluding the retractor)
EvoReel	3 ft.	22 ft. and 30 ft.
EvoReel	20 ft.	22 ft. and 30 ft.
Cable Retractor	N/A	N/A

Part Number	Pedestal Height
Channel Pedestal EVC0402	4 ft.
Channel Pedestal EVC0404	6 ft.
Channel Pedestal EVC0404	8 ft.
Concealed Pedestal EVC0408	4 ft.

### INPUT CIRCUIT INFORMATION

Level 2 EVSE Charging Stations are SAE J1772, 208-240VAC, Single Phase and require a dedicated 40A supply circuit.\*

\* All EvoCharge EVSE products can be field adjusted for use with 30A or 20A supply circuit.



EvoReel with Cable



Charging Station



Single Port 4ft. Concealed Pedestal Shown